

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 25 TWN. 15_N RNG. 4_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 6-19-2009
Party Chief: Greene
Crew: Taylor / Finney
Type of Marker: Harrison
Method of Establishment: County: 9-20-1999
IN S.P.C. E Zone, NAD 83
Name: 15042501
N: 497 024.529 0(m)
E: 67 586.226 0(m)

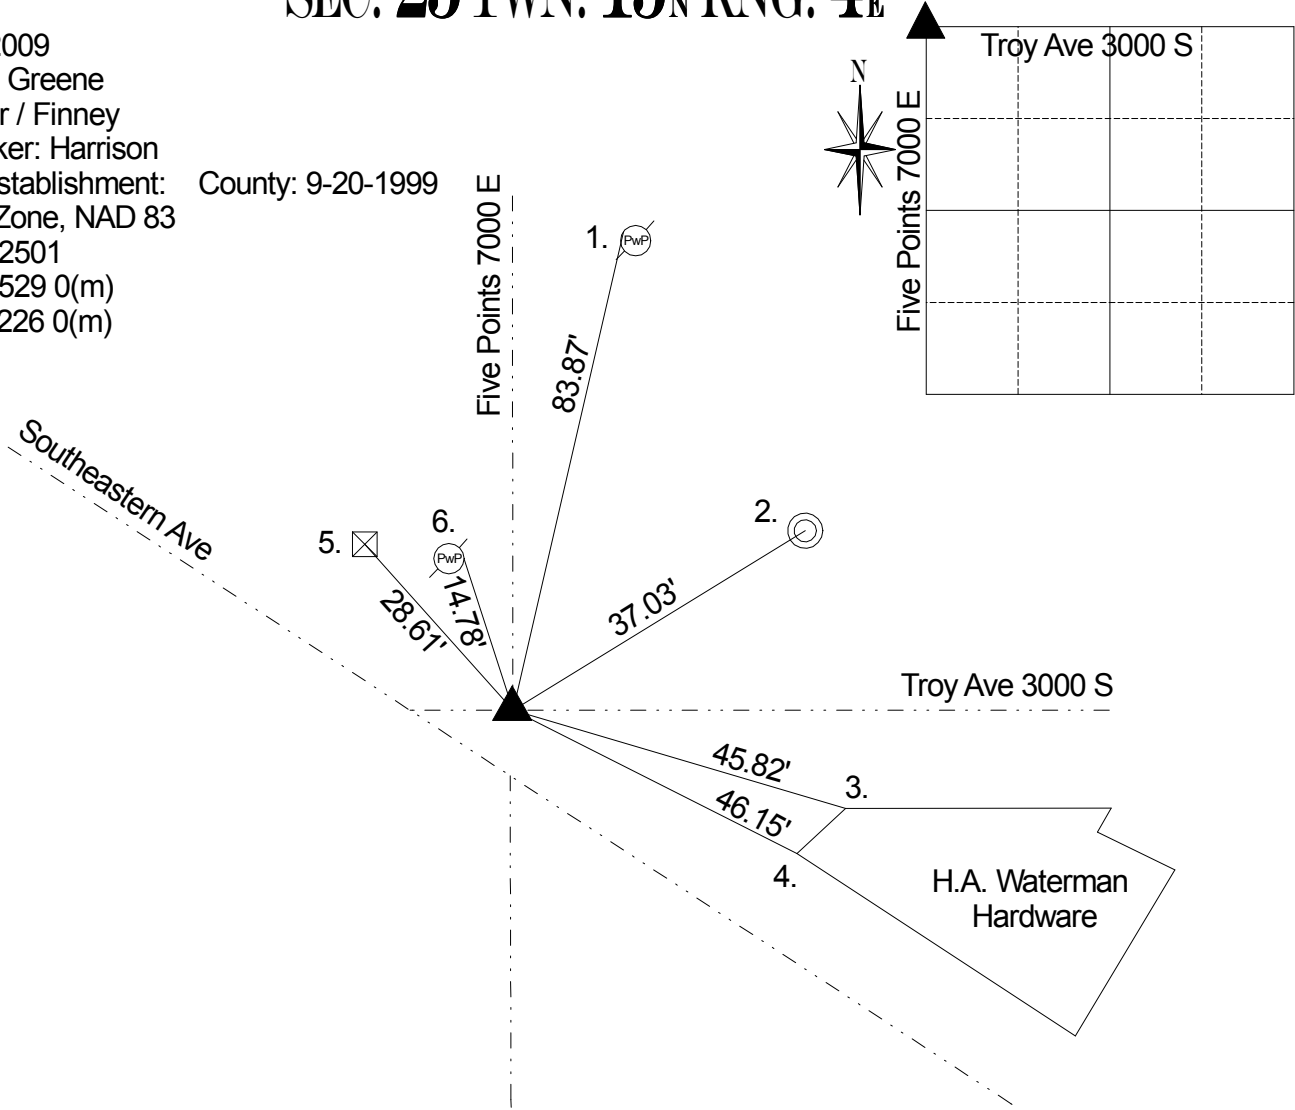

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 12” beech bearing N 10 E 9 links and a 6” dogwood bearing S 44 W 12 links. (Marion County Atlas p. 10) A survey by D.B. Hasbrook on March 20, 1851 indicates no stone or witnesses. (Franklin Legal Book p. 1) Corner referenced by MCS at an unknown date and called a steel pin over stone. Corner referenced by Monroe on 5/1/1957 and called a brass plug in steel box over stone. Corner referenced by Burres on 8/7/63 and called a brass plug in steel box over stone. Corner referenced by McLand on 4/19/71 and called a brass plug in steel box over stone. Corner referenced by Wilcoxen on 10/15/75 and called a brass plug. Corner referenced by Wilcoxen on 1/16/76 and called a brass plug. Corner referenced by Kiste on 10/19/94 and called a brass plug. Corner referenced by Kiste on 9/20/1999 and called a brass plug. Corner referenced by Wilcoxen on 5/11/2004 and called a brass plug. Corner excavated by Wilcoxen on 6/9/09 and a brass plug in steel box was found 3” down. Dug down 26” and no other points or stone were found. A #205 cast iron Harrison Monument was set in position of the brass plug.

REF.	DISTANCE	DESCRIPTION
1.	83.87'	Mag nail w/brass washer NW PwP #106-648 A 28" up
2.	37.03'	Center X manhole cover
3.	45.82'	NW corner of brick H.A. Waterman Hardware
4.	46.15'	Most western corner of brick H.A. Waterman Hardware
5.	28.61'	Center of R/W marker
6.	14.78'	Mag nail w/brass washer E PwP #184-648 A 6" up